



(11) **EP 1 124 356 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
16.08.2001 Bulletin 2001/33

(51) Int Cl.7: **H04L 12/56**

(21) Application number: **00307392.1**

(22) Date of filing: **29.08.2000**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
 Designated Extension States:
AL LT LV MK RO SI

- Chuah, Mool Choo
 Marlboro, New Jersey 007746 (US)
- Ho, Jean Tu
 Basking Ridge, New Jersey 07920 (US)
- Rai, Girish
 Bartlett, Illinois 60103 (US)

(30) Priority: **08.02.2000 US 500390**

(71) Applicant: **LUCENT TECHNOLOGIES INC.**
Murray Hill, New Jersey 07974-0636 (US)

(74) Representative:
Watts, Christopher Malcolm Kelway, Dr. et al.
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green Essex, IG8 0TU (GB)

(72) Inventors:
 • **Abraham, Santosh P.**
Keasbey, New Jersey 08832 (US)


(54) **Guaranteeing types of service in a packet-based system**

(57) A traffic management system for addressing quality-of-service concerns in a packet system combines a peak-rate shaper with weighted fair queuing scheduler for providing quality of service guarantees to a number of user connections. In one example, a front-end peak-rate shaper is combined with weighted fair

queuing scheduler for providing both peak rate shaping and an average bandwidth guarantee to a number of user connections. In addition, a back-end peak-rate shaper is combined with the weighted fair queuing scheduler for ensuring packets are not transmitted at a data rate higher than the available downlink/uplink bandwidth.

FIG. 1

100

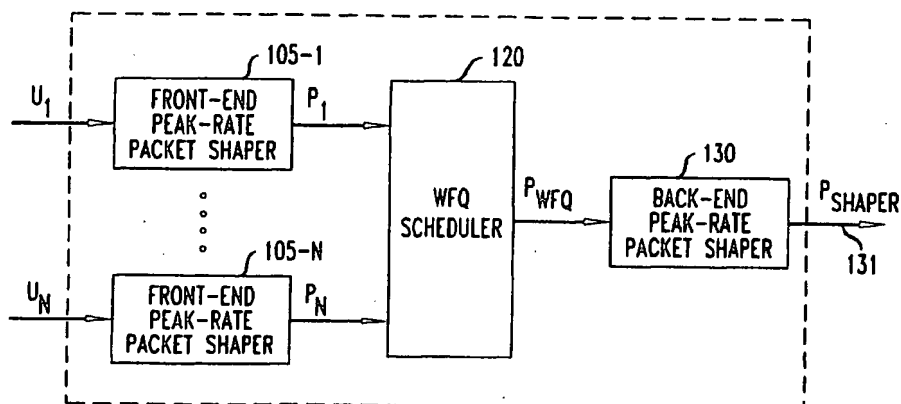

EP 1 124 356 A2

Description

FIELD OF THE INVENTION

5 [0001] This invention relates generally to communications and, more particularly, to packet communications systems.

BACKGROUND OF THE INVENTION

10 [0002] Access to the Internet is now occurring via the wireless domain. For example, it is now possible to purchase small hand-held devices such as the Palm VII™, which provide access to the Internet via a wireless connection to a service provider. Further, at least one equipment manufacturer is advertising a wireless Internet access system (i.e., the Wireless Internet Access System from Lucent Technologies Inc.). In such an environment equipment manufacturers and service providers are becoming concerned about "Quality-of-Service" (QoS) issues in providing such service to their customers. Some examples of QoS issues are guarantees on, e.g., bit rate, delay and packet loss.

SUMMARY OF THE INVENTION

15 [0003] We have realized a traffic management system for addressing quality-of-service concerns in a packet system. In particular, and in accordance with the invention, a peak-rate shaper is combined with weighted fair queuing scheduler for providing quality of service guarantees to a number of user connections.

20 [0004] In an embodiment of the invention, a front-end peak-rate shaper is combined with weighted fair queuing scheduler for providing both peak rate shaping and an average bandwidth guarantee to a number of user connections. In addition, a back-end peak-rate shaper is combined with the weighted fair queuing scheduler for ensuring packets are not transmitted at a data rate higher than the available downlink/uplink bandwidth.

BRIEF DESCRIPTION OF THE DRAWING

[0005]

30 FIG. 1 shows an illustrative block diagram of a traffic management system in accordance with the principles of the invention;
FIG. 2 shows an illustrative method for use in a back-end peak rate shaper in accordance with the principles of the invention;
FIG. 3 shows a portion of a wireless internet access network embodying the principles of the invention;
35 FIGs. 4 and 5 show illustrative uplink embodiments of a traffic management system in accordance with the principles of the invention;
FIGs. 6 - 7 show other illustrative embodiments of a traffic management system; and
FIG. 8 shows an illustrative high-level block diagram of a packet server for use in accordance with the principles of the invention.

DETAILED DESCRIPTION

40 [0006] A portion of a communications system comprising an illustrative traffic management system 100 in accordance with the principles of the invention is shown in FIG. 1. Other than the inventive concept, the elements shown in FIG. 1 are well known and will not be described in detail. For example, weighted fair queuing schedulers, by themselves, are known in the art (e.g., see "A Self-Clocked Fair Queueing Scheme for Broadband Applications," J. Golestani, Proceeding of IEEE Infocom 1994, pp 5c.1.1-5c.1.11). Similarly, peak rate shapers (also known as "traffic shapers"), by themselves, are known in the art (e.g., see "ISDN and Broadband ISDN with Frame Relay and ATM," by W. Stallings, Prentice Hall, 1995, pp 382 - 406, 492 - 516). Although shown as single block elements, the elements of traffic management system 100 include stored-program-control processors, memory, and appropriate interface cards (not shown). The term "packet server" as used herein refers to any packet processor, illustrations of which are the above-mentioned elements of traffic management system 100. In addition, the inventive concept is implemented using conventional programming techniques, which as such, will not be described herein. Since call admission techniques are not necessary to the inventive concept, it is assumed that each user negotiates with a call admission process (not shown) to establish a committed information rate (CIR) in bits per second (bps). The CIR for a particular user is referred to herein as CIR_i , where the number of users is equal to N , and $1 \leq i \leq N$.

55 [0007] Traffic management system 100 comprises a number, or a set, of front-end peak-rate shapers 105-1 through 105-N for servicing N users, each of which have an associated user packet flow U_1 through U_N ; a weighted fair queuing

(WFQ) scheduler 120; and a back-end peak-rate shaper 130.

[0008] The front-end peak rate shapers 105 are used to ensure that the peak rate of each connection is as negotiated with the network. For example, each peak-rate packet shaper implements a token generator (not shown), a user queue (not shown) and a transmission queue (not shown). The token generator repetitively generates token (in bytes) at the peak rate, P_i for maximum burst size (in bytes), and is idle for a period T_i such that the overall average token rate is equal to the CIR for that user, i.e., CIR_i . Every time a packet of user i arrives at a respective packet shaper that packet is passed through the system to the transmission queue if the packet shaper has a token large enough to accommodate the size of the newly arrived packet. Conversely, if a large enough token does not exist, the newly arrived packet is queued in the user queue until a token at least larger than, or equals to, its size is available. It is assumed that the front-end peak-rate packet shaper generates a service tag for each user packet flow, U_i . This service tag is based on the average bandwidth, CIR_i , negotiated by each user, and the length of the particular packet. Packets passed by a respective packet shaper to the transmission queue are tagged with their appropriate service tag (such tagging is described in the above-mentioned article by Golestani).

[0009] For example, each arriving packet, p_k^i , of a session k , is tagged with a service tag, F_k^i , before it is placed in the transmission queue (where $i = 1, 2, \dots$, and $k \in B$, and B is the set of admitted connections). For each session, k , the service tags of the arriving packets are computed in an iterative fashion:

$$F_k^i = \frac{L_k^i}{r_k} + \max(F_k^{i-1}, v(a_k^i)); \quad (1)$$

where $F_k^0 = 0$, L_k^i is the length of the packet, p_k^i , in bytes; r_k is the negotiated rate for the k^{th} session; a_k^i is the arrival time of the packet, p_k^i ; and $v(a_k^i)$ is the system virtual time at the time of arrival, a_k^i , ("system virtual time" is known in the art, e.g., typically a counter (not shown) is updated).

[0010] The packets in the transmission queue are picked up for servicing by the weighted fair queuing (WFQ) scheduler 120 in increasing order of the associated service tags. As a result, WFQ scheduler 120 ensures that each connection gets a minimum of its negotiated average bandwidth. (As noted, it is assumed that the above-mentioned self-clocked fair queuing (SCFQ) scheme is used. However, the SCFQ scheme is merely illustrative and is not necessary to the inventive concept, any algorithm can be used.) It should be noted that if the incoming packet flows are further segregated by service class (described further below), WFQ scheduler 120 also transmits packets as a function of their service classification.

[0011] The back-end peak-rate shaper is used to ensure that the overall peak rate does not exceed the available bandwidth over the communications channel (here, represented by 131 of FIG. 1). The back-end peak-rate traffic shaper 130 operates as follows. It is assumed that $x\%$ of the total bandwidth ($B_{total}T$) is available for transmission of packets (as represented by packet flow P_{shaper}) from back-end peak-rate traffic shaper 130 over the outgoing communications channel (as represented by the arrow 131). (B_{total} represents the total bandwidth, e.g., in bytes per interval of time and T represents an interval to time). A variable, *Bytes_remaining*, is initialized to:

$$Bytes_remaining = (x\%/100)(B_{total}T) - system\ overhead; \quad (2)$$

where *system overhead* represents the number of bytes taken up by control messages. For every packet that is sent out by back-end peak-rate shaper 130, the value of *Bytes_remaining* is reduced by:

$$Bytes_remaining = Bytes_remaining - (Ceiling(pktsize/macfragment)*(mac_fragment + mac\ overhead)); \quad (3)$$

where,

pktsize = packet size;

macfragment = size of a media access control (MAC) link layer fragment;

macoverhead = the number of bytes added by the media access control link layer; and

Ceiling() - takes the smallest integer value that exceeds the value (i.e., rounds up to the next highest integer value).

Every T seconds the value of *Bytes_remaining* is reset to

$$(x\%/100)(B_{total}T). \quad (4)$$

[0012] An illustrative method for use in back-end peak-rate packet shaper 130 is shown in FIG. 2. Assume that FIG. 1 represents a portion of a downlink communications path to a mobile endpoint, e.g., from the Internet to wireless mobile stations (not shown). In step 205 of FIG. 2, the value of *Bytes_remaining* is initialized. In particular, an illustrative total available airlink bandwidth is 4000 bytes every 20 milli-seconds (ms), i.e., $B_{total}T = 4000$ bytes. Of this, it is presumed that $x = 60\%$ is an available downlink bandwidth and there is no *system overhead* in the downlink direction, i.e., $Bytes_remaining = (60\%/100)(4000) - 0 = 2400$ bytes. In step 210, back-end peak-rate packet shaper 130 waits for a packet to be available for transmission downlink. Once a packet is available, the value of *Bytes_remaining* is checked in step 220. If the value of *Bytes_remaining* is sufficient to send at least one MAC fragment, the packet is shipped, i.e., transmitted, and the value of *Bytes_remaining* is reduced as shown in equation (3) in step 225, and back-end peak-rate packet shaper 130 waits for another packet. However, if the value of *Bytes_remaining* is not sufficient to send at least one MAC fragment, the packet is not shipped until 20 ms later as represented by step 230. Regardless, the value of *Bytes_remaining* is reset every 20 ms to 2400 bytes. In this example, it should be noted that to take care of the additional bandwidth required to do MAC layer retransmission, the value of *Bytes_remaining* can be initialized to e.g., 95% of 2400 bytes (indirectly reserving 5% for MAC layer retransmissions). (In terms of equation (2), this is $(x\%/100)(B_{total}T)(.95) - system\ overhead$, however, the value of *system overhead* in this example is, as noted, zero.)

[0013] Alternatively, assume that FIG. 1 represents an uplink communications path from a mobile endpoint, e.g., from wireless mobile stations to the Internet (not shown) and the method illustrated in FIG. 2 is used. The illustrative total available airlink bandwidth, as noted above, is 4000 bytes. Of this, it is presumed that $x = 40\%$ is an available uplink bandwidth (recall, that 60% was dedicated to downlink transmission in the earlier example). In this example, the *system overhead* is not equal to zero and the value of *Bytes_remaining* is initialized as in equation (2). Here, the value of the *system overhead* variable is equal to an estimate of the overhead caused by beacon, MAC layer acknowledgements (Acks), and reservation slots messages in the uplink direction. In particular, *Bytes_remaining* is initialized to $1600 - system\ overhead$ (FIG. 2, step 205). Everytime a packet is available for transmission uplink, the value of *Bytes_remaining* is checked (FIG. 2, steps 210 and 220). If the value of *Bytes_remaining* is sufficient to send at least one MAC fragment, the packet is shipped, i.e., transmitted, and the value of *Bytes_remaining* is reduced as shown in equation (3) (FIG. 2, step 225). However, if the value of *Bytes_remaining* is not sufficient to send at least one MAC fragment, the packet is not shipped until 20 ms later (also referred to as a "dwell" time) (FIG. 2 step 230). Regardless, the value of *Bytes_remaining* is reset every dwell as shown in equation (2), i.e., $(1600 - system\ overhead)$ (FIG. 2 step 230). In this example, it should be noted that to take care of the additional bandwidth required to do MAC layer retransmission, the value of *Bytes_remaining* can be initialized to e.g., $((1600)(.95) - system\ overhead)$.

[0014] It should be noted that for cases where the airlink bandwidth can vary significantly due to the fading phenomena, the following alternative closed-loop feedback mechanism can be used to estimate the available airlink bandwidth. Such estimates can then be used to replace the fixed numbers like 4000 bytes or 1600 bytes used above.

[0015] For example, assume the following definitions:

B_{fix} - represents the fixed airlink bandwidth (this is known *a priori*); and
T - is an observation period, expressed as multiples of dwell times;

[0016] For the downlink direction, the access point (or, in the uplink direction, the wireless modem) estimates the downlink (uplink) available airlink bandwidth as follows:

- (a) measure the number of bytes transmitted downlink (uplink) for the period T, this is B_{tx} ;
- (b) measure the number of bytes received uplink (downlink) for the period T, this is B_{rx} ; and
- (c) calculate B_{total} , the estimated airlink bandwidth, as a function of (B_{tx}/B_{rx}) (described below).

[0017] The estimated airlink bandwidth, B_{total} , can be calculated in a number of ways. Two illustrative calculations are shown below. In the first example,

$$B_{total} = B_{fix} (B_{tx}/B_{rx}). \quad (5)$$

This is also referred to as the "independent window version."

[0018] In the second example, a "sliding window" is used. In this example a portion of the previous calculation is used to calculate the current value. In particular,

EP 1 124 356 A2

$$success = (1 - \alpha)success + \alpha(B_{tx}/B_{rx}); \text{ and} \quad (6)$$

$$B_{total} = (B_{fix})(success). \quad (7)$$

where the variable *success* is initialized to the first calculation of (B_{tx}/B_{rx}) ; and α (which is related to how much of the previous calculation is remembered (e.g., its history)) is illustratively equal to 6;

[0019] Alternatively, one can use the values of B_{fix} and monitor the downlink (uplink) buffer occupancy in the access point (wireless modem). Whenever the downlink (uplink) buffer occupancy exceeds a certain predefined threshold, a flow control message is sent to the wireless hub (or end system, i.e., the user terminal in the case of the wireless modem) to stop the flow of packets. When the buffer occupancy drops below a certain threshold, then another flow control message is sent to reactivate the flow of packets.

[0020] An illustrative application of the traffic management system is shown in FIG. 3, which illustrates a portion 300 of a wireless internet access system embodying the inventive concept. (Other than the inventive concept, an example of a wireless internet access system as illustrated in FIG. 3 is the Wireless Internet Access System from Lucent Technologies Inc.) Portion 300 comprises a number of base stations such as base station 315, which is an example of a wireless point-of-presence (POP) server that provides L2TP (Layer 2 Tunneling Protocol) access control (LAC). Each base station comprises a wireless hub (WH) that serves an area through a plurality of access points (e.g., AP₁, AP₂, AP₃ and AP₄ of base station 315). Each access point includes a radio access controller as known in the art for communicating with a plurality of wireless modems as represented by wireless modems 310-1 through 310-N (each wireless modem is associated with a wireless subscriber as represented by user personal computer (PC) 305-1 through user PC 305-N). (It should be noted that each PC is representative of data terminal equipment (DTE) as known in the art.) Each wireless modem communicates with a respective base station via an uplink channel (as represented by line 311) and a downlink channel (as represented by line 312). The combination of a wireless modem and user PC represents a wireless endpoint, which may, or may not, be mobile. Each base station is coupled to a private IP network through frame relay over T1/E1 facilities. The wireless internet access network is coupled to the public IP network through a data switching center (DSC) 330 to a router firewall 335, as known in the art, for communicating with Internet Service Providers (ISPs) or Corporate Intranets using L2TP, UDP/IP (User Datagram Protocol/Internet Protocol), etc.

[0021] It is assumed that the wireless internet access system illustrated by FIG. 3 utilizes a half-duplex MAC (media access control layer) between the base stations and the wireless endpoints where the downlink/uplink ratio is configurable or dynamically adjusted (e.g., as illustrated above, the downlink channel was 60% and the uplink channel was 40% of the total channel bandwidth). In this system, each AP polls their associated wireless modems for uplink transmissions. For example, in the context of FIG. 3, AP₁ polls the set of modems 310-1 through 310-N for any uplink transmissions (polling techniques are known in the art and not described herein).

[0022] In the downlink direction, the traffic management system 100 resides in the wireless hub (e.g., WH of base station 315 of FIG. 3). In this example, a WH comprises four traffic management systems, one for each AP of base station 315. When the WH has a packet for transmission to a particular user, e.g., the user associated with user PC 305-1, WH performs the method illustrated in FIG. 2 before sending a packet out to AP₁. The latter transmits packets to the wireless endpoint in a first-in-first-out (FIFO) fashion.

[0023] In the uplink direction, the traffic management system 100 is capable of a number of alternative implementations. One example is shown in FIG. 4, which shows a portion of the wireless internet access network of FIG. 3. Each front-end peak-rate traffic shaper is associated with user specific equipment, e.g., wireless modems 310-1 through 310-N. (Alternatively, the packet shaper could be a part of a user's PC (not shown), such a PC 305-1 of FIG. 3. Both the PC and the wireless modem are representative of a wireless endpoint.) As described for FIG. 1, each wireless modem receives a user packet flow, U_p . As described earlier, the front-end peak-rate packet shaper (of each wireless modem) shapes the traffic and transmits a respective packet flow, P_p , via an uplink channel, e.g., uplink channel 311, to their respective access point, e.g., AP₁, upon receipt of a transmit poll from their respective access point, e.g., AP₁. The WFQ scheduler 120 is run in a centralized manner at an AP (here, illustrated by AP₁ of FIG. 4). In this case, the associated wireless modems need to send queue size information (with respect to the number of bytes awaiting uplink transmission) to the respective AP (status transmissions from a mobile endpoint, such as received signal-to-noise ratio, are known in the art and will not be described herein.). Each AP, e.g., AP₁ of FIG. 4, also implements the back-end peak-rate shaper (described earlier) to ensure that sufficient uplink bandwidth is available before issuing polls for its associated wireless modems (via downlink channel 312) using the above described method illustrated in FIG. 2. For example, if the value of *Bytes_remaining* is not sufficient to send at least one MAC fragment, the AP, e.g., AP₁, will not send a transmit poll to that wireless modem, e.g., wireless modem 310-1, until the next dwell. The *Bytes_remaining* variable is reset every dwell according to equation (2).

[0024] Another alternative implementation of a traffic management system is shown in FIG. 5. The system shown in FIG. 5 is similar to that shown in FIG. 4 except that the WFQ scheduler is run at each wireless modem in a distributed manner. This assumes that network elements, such as an AP (as represented by AP₁ of FIG. 5) broadcast the system virtual time and that each AP (e.g., AP₁) polls (e.g., via an downlink channel such as 312) their respective wireless modems for any uplink transmissions (as represented by uplink channel 311).

[0025] It should be noted that it is hard to estimate the available downlink/uplink bandwidth for a packet payload since both the packet payload is variable as is the total MAC overhead, which itself is a function of the size of the packet payload. However, the Back-End Peak-Rate Traffic Shaper is a flexible way to ensure that packets are not transmitted at a rate higher than the available downlink/uplink bandwidth, which could cause queuing delays in other network elements (such as an access point of a wireless Internet access systems).

[0026] Another alternative implementation is shown in FIG. 6. In FIG. 6, traffic management system 600 comprises packet classifier 605; a number of user queues, as represented by user 1 queue 610-1 through user N queue 610-N; a number of WFQ Tagging elements 615-1 through 615-N; three class queues as represented by CIR (committed information rate) class queue 630, control class queue 625, and best effort class queue 620; WFQ scheduler 635 and packet shaper 640. Essentially, traffic management system 600 functions in a similar fashion to traffic management system 100 of FIG. 1 except as noted below.

[0027] In traffic management system 600 there are three classes of service for packet traffic. These classes of service (CoS) are: committed information rate (CIR), control, and best effort. Control represents control information, e.g., signaling and status. The CIR class and best effort class represent the transport of user, i.e., bearer, data. For users that get CIR service, the service provider (not shown) specifies the committed information rate (CIR), the burst rate (Br) and the burst size (Bs), similar to parameters specified for traditional frame relay service. For best effort (BE) service, the service provider specifies the maximum information rate for an individual user. Assignment of a user to either the CIR or best effort class is performed by call admission procedures (not described herein).

[0028] Incoming packets (represented by P_{input}) are applied to packet classifier 605, which classifies, or identifies, incoming packets by user and assigns them to the appropriate user queue (e.g., packets from user 1 are assigned to the queue for user 1, here represented by 610-1). Each user queue stores packets after user classification. Each user can have three classes of traffic as illustrated by user 1 queue 610-1. In particular, control (CTL), CIR and BE. If a user queue is full, excess packets are discarded. Each respective tagging element, e.g., WFQ tagging element 615-1, assigns service tags for its respective user queue, e.g., user 1 queue 610-1. As noted above, the SCFQ algorithm is illustratively used to assign service tags. Once instance of SCFQ is initiated for each class. These service tags are assigned based on the bit rate assigned to the user and the length of the packet. The service tags are used to create an ordered queue of outbound packets. Packets (appropriately identified by class and service tag) are routed to their particular class queue. Those packets identified as control are queued in control class queue 625; those packets identified as CIR class are queued in CIR class queue 630; and those packets identified as best effort class are queued in best effort class queue 620.

[0029] The control class queue 625 is used for control packets that are sent in the bearer plane. One illustration of such packets are PPP (point-to-point protocol) control packets. All users, when they connect will be allowed to send and receive a small number of packets via this queue to ensure that PPP negotiations conclude successfully, even under heavy loads. During the PPP negotiations phase, all CIR class users will be assigned the same weight. All best effort class users will also be assigned the same rate. The CIR class weight will be higher than the best effort weight to give CIR users higher priority than best effort users during PPP negotiations. Packets in CIR class queue 630 are queued in order of service tag values. Similarly, packets in the best effort class queue 620 are queued in order of service tag values. WFQ Scheduler 635 transmit packets from the three class queues based on the fraction of the link bandwidth assigned to each class or based on an absolute priority across classes (e.g., control packets are higher in priority than CIR packets, which are higher than BE packets). As noted above, weighted fair queuing is used for this function. This ensures that each class gets a fair share of the available bandwidth of the link.

[0030] Packet shaper 640 performs the above-described back-end peak-rate packet shaping function to limit the maximum data transmit rate over the physical link. This allows different types of traffic (represented by P_{output}) to share a physical link, for example sharing a frame relay PVC between network management and bearer traffic.

[0031] The traffic management system of FIG. 6 can be applied to the wireless Internet access network shown in FIG. 3. For example, in the downlink direction, the traffic management system 600 resides in the wireless hub (e.g., WH of base station 315 of FIG. 3). In this example, a WH comprises four traffic management systems, one for each AP of base station 315. When the WH has a packet for transmission to a particular user, e.g., the user associated with user PC 305-1, WH performs the method illustrated in FIG. 2 before sending a packet out to AP₁. The latter transmits packets to the wireless endpoint in a first-in-first-out (FIFO) fashion.

[0032] Similarly, in the uplink direction, an illustrative embodiment of the traffic management system 600 is shown in FIG. 7. Each front-end peak-rate traffic shaper is associated with user specific equipment, e.g., wireless modems 610-1 through 610-N. (Alternatively, the packet shaper could be a part of a user's PC (not shown)) As described for

EP 1 124 356 A2

FIG. 1, each wireless modem receives a user packet flow (not shown). In this example, there is a packet shaping function for each of the bearer traffic classes (e.g., CIR and best effort). (It should be observed that it is assumed that control class data is generated internally by each wireless modem.) In order to support multiple classes, the MAC must be modified (such a modification is straightforward and will not be described herein). As described earlier, each front-end peak-rate packet shaper (of each wireless modem) shapes the traffic and transmits a respective packet flow, P_p , via an uplink channel, e.g., uplink channel 611, to their respective access point, e.g., AP_1 , upon receipt of a transmit poll from their respective access point, e.g., AP_1 .

[0033] In this example, each class of uplink traffic awaits transmission in a respective queue. As noted above, the highest priority service class will be used for control messages (such packets awaiting transmission are stored in the control queue of each wireless modem). The next lower priority service class will be used to support committed information rate service (such packets awaiting transmission are stored in the high priority bearer data queue of each modem). The lowest priority service class will be used to support best effort users (such packets awaiting transmission are stored in the low priority bearer data queue of each modem). While bidding for permission to transmit data in the uplink direction, each wireless modem indicates to its respective AP the number of bytes (or packets) in its queue that belong to each service level. The respective AP implements a weighted scheduler that assigns transmit permits to wireless modems based on the uplink data that each WM has to transmit and the weights assigned to each class of traffic. In this example, control data is higher than CIR data, which is higher than best effort data. Each AP will transmit all packets to traffic management system 600 (described above) of a wireless hub (WH) in FIFO order. (It should be noted that the AP may give retransmitted packets higher priority.)

[0034] Turning briefly to FIG. 8, a high-level block diagram of a representative packet server for use in accordance with the principles of the invention is shown. Packet server 805 is a stored-program-control based processor architecture and includes processor 850, memory 860 (for storing program instructions and data, e.g., for performing the above-described method shown in FIG. 2, etc.) and communications interface(s) 865 for coupling to one or more packet communication paths as represented by path 866.

[0035] The traffic management system described above is useful for providing virtual lease line services to users (also referred to as end users). In particular, each user can buy a service that guarantees certain average and peak bandwidths since the traffic management system described above provides both peak rate shaping and average bandwidth guarantee.

[0036] The foregoing merely illustrates the principles of the invention and it will thus be appreciated that those skilled in the art will be able to devise numerous alternative arrangements which, although not explicitly described herein, embody the principles of the invention and are within its scope. For example, although illustrated in the context of a wireless system, the inventive concept is applicable to any system (e.g., wired, etc.) that addresses QoS. Similarly, although illustrated in the context of a half-duplex MAC layer, it is equally applicable to a full-duplex MAC layer.

Claims

1. A traffic management system for use in a packet system, the traffic management system comprising:

a packet classifier;
a plurality of user queues, each user queue storing packets identified by the packet classifier as belonging to a respective user;
a plurality of packet tagging elements, each tagging element associated with one of the user queues and wherein each tagging element attaches service tags to packets stored in their associated user queues;
a number of class queues for further segregating the service tagged packets according to packet class;
a weighted fair queuing scheduler for servicing the packets queued in the number of class queues, wherein the servicing is a function of packet class and service tag; and
a back-end packet-shaper for shaping the serviced packets provided by the weighted fair queuing scheduler for transmission over a communications channel.

2. A method for use in a packet system, the method comprising the steps of:

shaping packets flows from each of a number of wireless endpoints for transmission to a base station;
servicing the shaped packets flows from each of the number of wireless endpoints with a weighted fair queuing scheduler; and
further shaping the serviced packets flows to provide an output packet flow.

3. The method of claim 2 wherein at least one wireless endpoint comprises a wireless modem and the shaping step

EP 1 124 356 A2

includes the step of shaping at least one packet flow within the wireless modem.

4. The method of claim 2 wherein at least one wireless endpoint comprises data terminal equipment and the shaping step includes the step of shaping at least one packet flow within the data terminal equipment.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

100

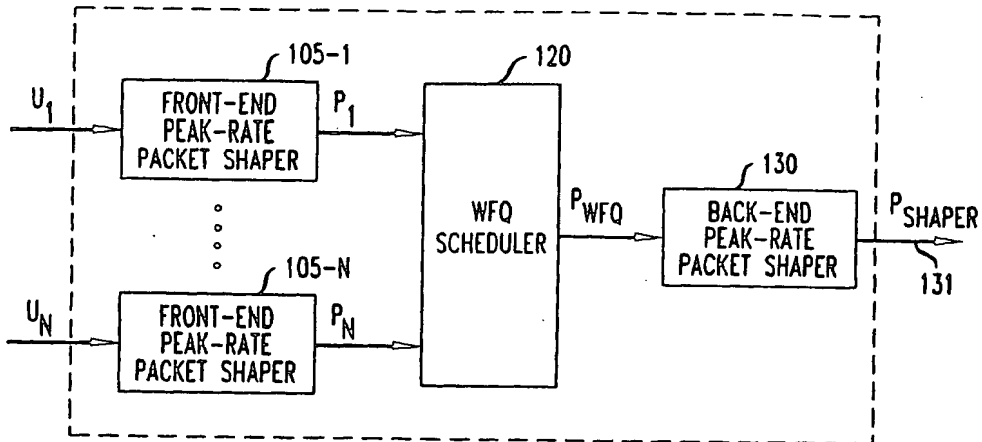


FIG. 2

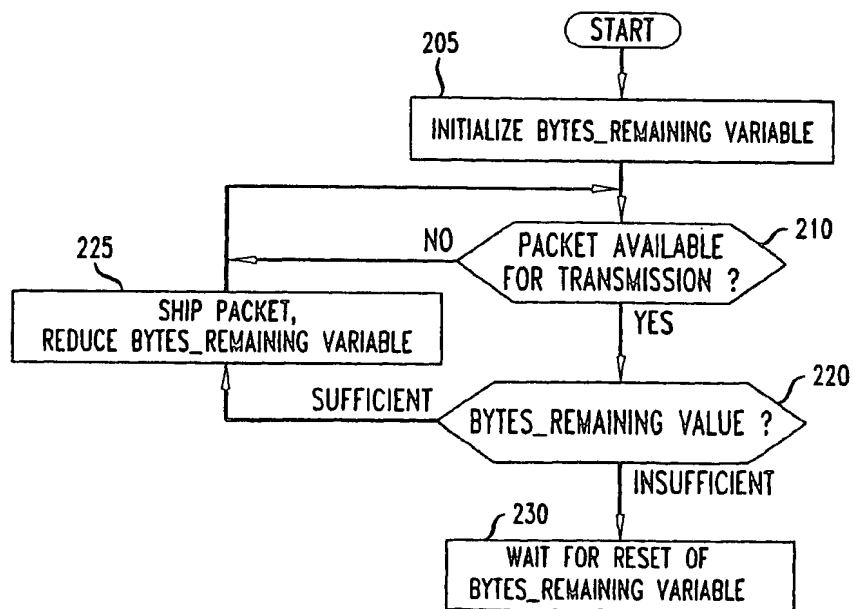


FIG. 3

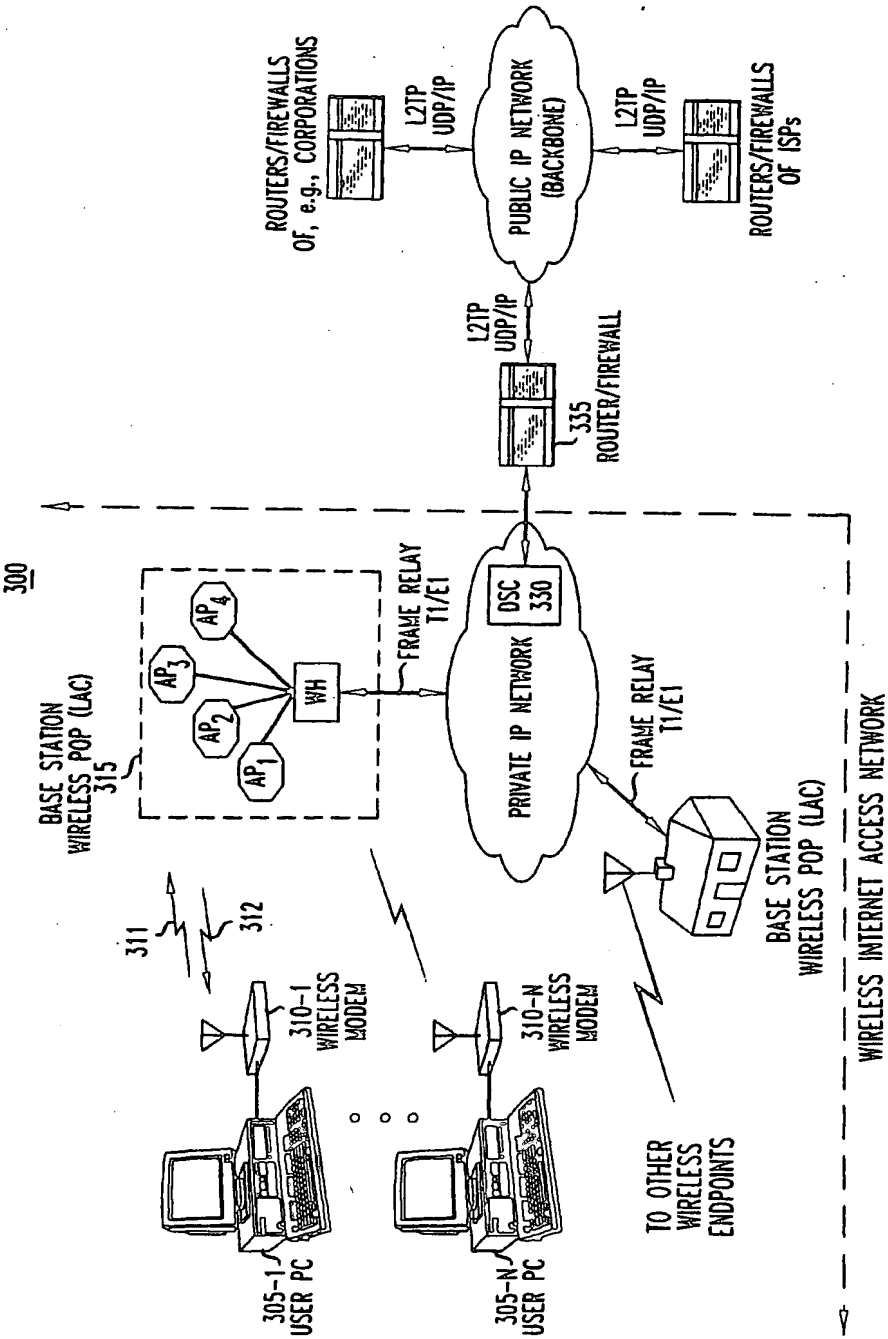


FIG. 4

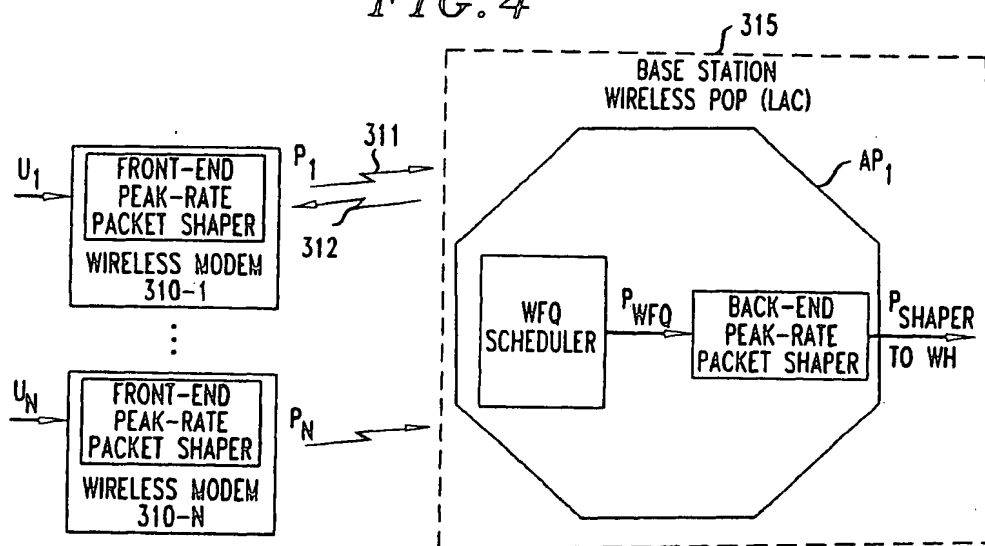


FIG. 5

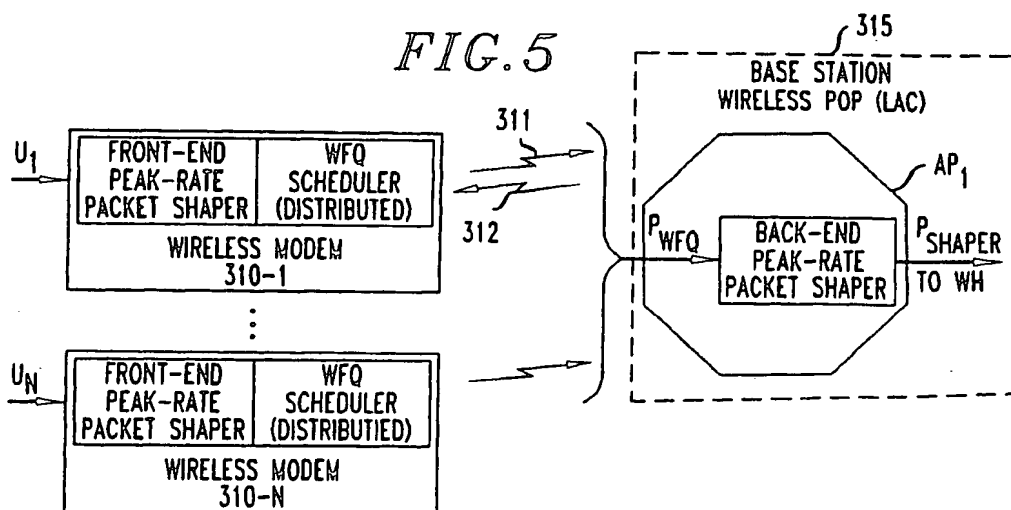


FIG. 6

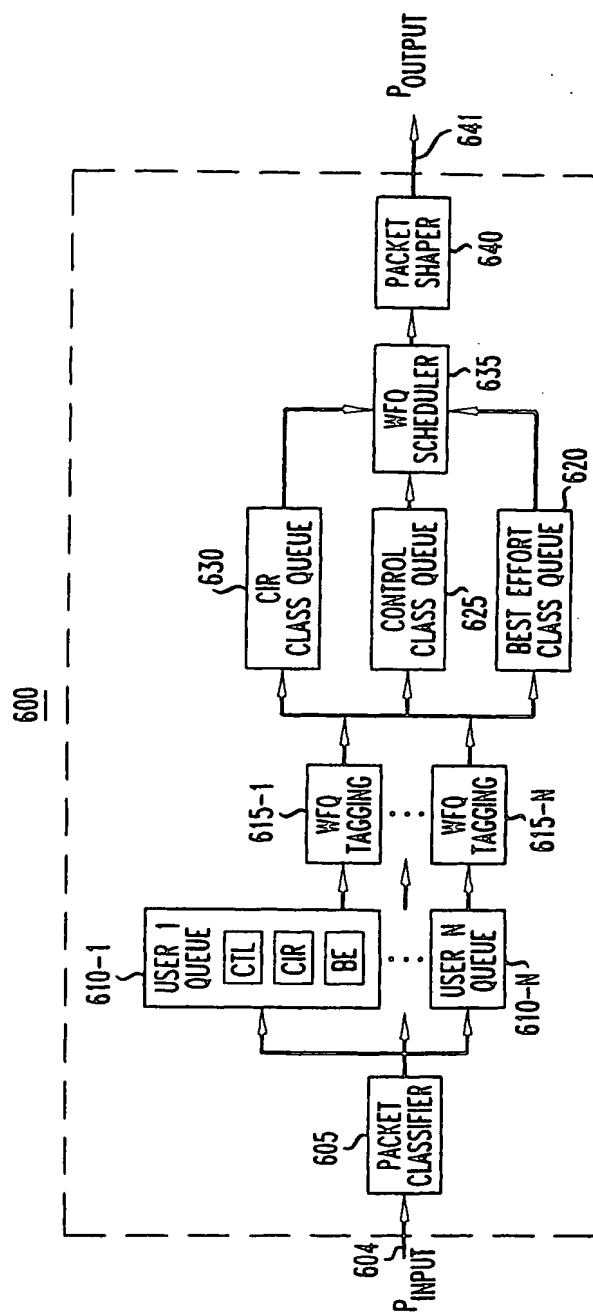


FIG. 7



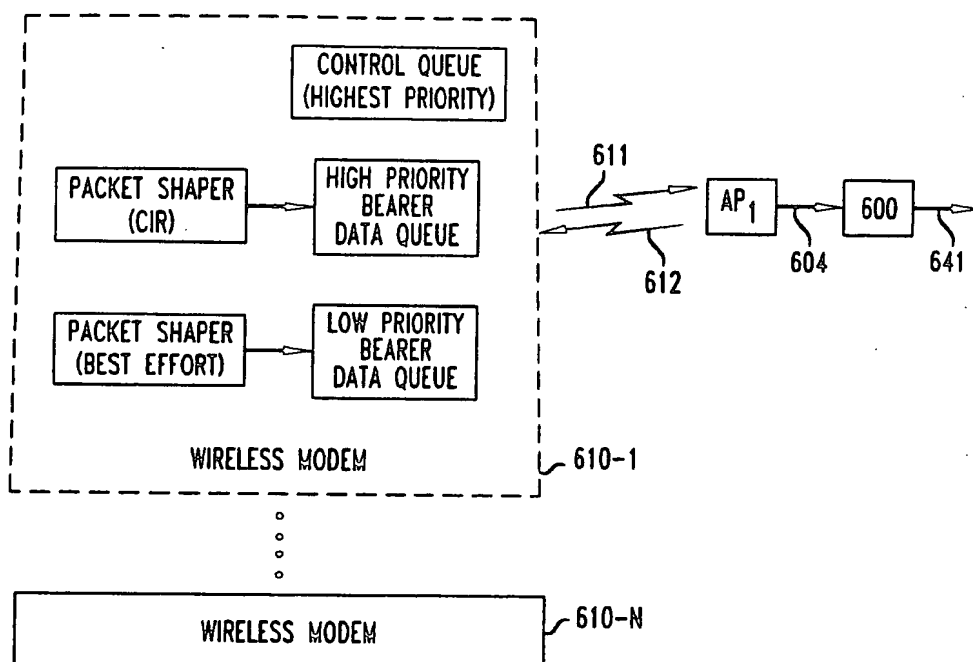


FIG. 8



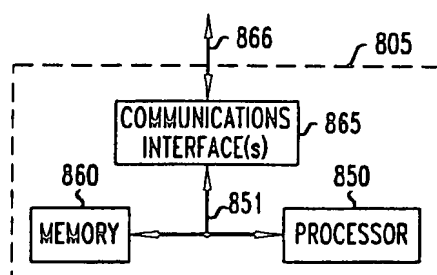

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 124 356 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
06.03.2002 Bulletin 2002/10

(51) Int Cl.7: H04L 12/56

(43) Date of publication A2:
16.08.2001 Bulletin 2001/33

(21) Application number: 00307392.1

(22) Date of filing: 29.08.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

• Chuah, Mool Choo
Marlboro, New Jersey 007746 (US)
• Ho, Jean Tu
Basking Ridge, New Jersey 07920 (US)
• Rai, Girish
Bartlett, Illinois 60103 (US)

(30) Priority: 08.02.2000 US 500390

(71) Applicant: LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)

(74) Representative:
Watts, Christopher Malcolm Kelway, Dr. et al
Lucent Technologies (UK) Ltd, 5 Mornington
Road
Woodford Green Essex, IG8 0TU (GB)

(72) Inventors:
• Abraham, Santosh P.
Keasbey, New Jersey 08832 (US)


(54) Guaranteeing types of service in a packet-based system

(57) A traffic management system for addressing quality-of-service concerns in a packet system combines a peak-rate shaper with weighted fair queuing scheduler for providing quality of service guarantees to a number of user connections. In one example, a front-end peak-rate shaper is combined with weighted fair

queuing scheduler for providing both peak rate shaping and an average bandwidth guarantee to a number of user connections. In addition, a back-end peak-rate shaper is combined with the weighted fair queuing scheduler for ensuring packets are not transmitted at a data rate higher than the available downlink/uplink bandwidth.

FIG. 1

100

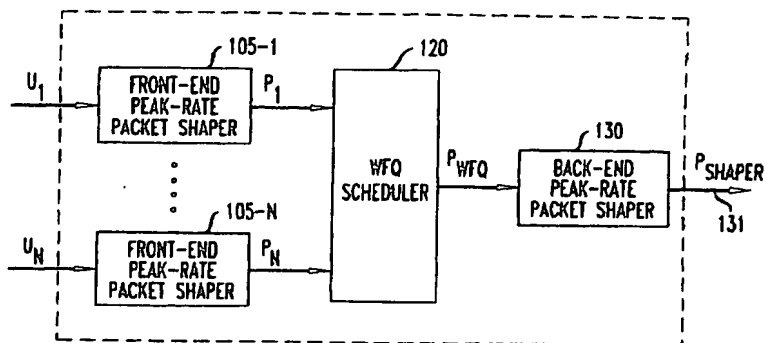

EP 1 124 356 A3

EP 1 124 356 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 7392

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 817 436 A (NEWBRIDGE NETWORKS CORP ;XEROX CORP (US)) 7 January 1998 (1998-01-07) * page 3, line 16 - line 50 * * page 4, line 25 - page 5, line 15 *	1	H04L12/56
X	EP 0 977 402 A (NEWBRIDGE NETWORKS CORP) 2 February 2000 (2000-02-02) * column 1, line 44 - column 5, line 43 * * column 8, line 23 - line 42 * * figures 1-3 *	1	
X	WO 99 21313 A (NETRO CORP) 29 April 1999 (1999-04-29) * figure 30 * * page 43, line 13 - page 44, line 7 *	2-4	
P,X	WO 00 30307 A (NORTEL NETWORKS CORP ;NICHOLS KATHLEEN M (US)) 25 May 2000 (2000-05-25) * figures 2,3 * * page 8, line 13 - page 13, line 8 *	1	
A	REARDON M: "TRAFFIC SHAPERS: IP IN CRUISE CONTROL" DATA COMMUNICATIONS, MCGRAW HILL. NEW YORK, US, vol. 27, no. 13, 21 September 1998 (1998-09-21), pages 66,68-73, XP000785256 ISSN: 0363-6399 * the whole document *	1	<div>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</div> H04L
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 14 December 2001	Examiner Perez Perez, J
<div>CATEGORY OF CITED DOCUMENTS</div> <div> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document </div> <div> T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document </div>			

EPC FORM 1503 (12/92) (p.4/6)

EP 1 124 356 A3



European Patent
Office

Application Number

EP 00 30 7392

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number
EP 00 30 7392

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claim : 1

Traffic management system

2. Claims: 2-4

Method for shaping packets from wireless endpoints for
transmission to a base station

EP 1 124 356 A3

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 00 30 7392

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-12-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0817436 A	07-01-1998	US 6064677 A	16-05-2000
		EP 0817431 A2	07-01-1998
		EP 0817432 A2	07-01-1998
		EP 0817433 A2	07-01-1998
		EP 0817434 A2	07-01-1998
		EP 0817435 A2	07-01-1998
		EP 0817436 A2	07-01-1998
		JP 10242999 A	11-09-1998
		JP 10190691 A	21-07-1998
		JP 10190692 A	21-07-1998
EP 0977402 A	02-02-2000	EP 0977402 A2	02-02-2000
WO 9921313 A	29-04-1999	US 6157614 A	05-12-2000
		AU 1191799 A	10-05-1999
		DE 1034634 T1	19-07-2001
		EP 1034634 A2	13-09-2000
		ES 2155815 T1	01-06-2001
		WO 9921313 A2	29-04-1999
WO 0030307 A	25-05-2000	AU 1525600 A	05-06-2000
		EP 1135897 A1	26-09-2001
		WO 0030307 A1	25-05-2000

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82